

It's Fendt. Because we understand Agriculture.


fendt.com | Fendt is a worldwide brand of AGCO.



Cutter drum mower

		Working width (m)	Cutting drums / blades per cutting drum (number)	Power requirement (kW/hp)
	2940 FPV	2.86	4 / 3	55 / 75
	3140 FPV	3.06	4 / 3	55 / 75
	3340 FPV	3.26	4 / 3	55 / 75
	310 TL	3.06	4 / 3	60 / 82

Slicer disc mower

		Working width (m)	Cutting drums / blades per cutting drum (number)	Power requirement (kW/hp)
	ALPINE 260 FP	2.50	4 / 2	28 / 38
	ALPINE 260 FPS	2.50	4 / 2	28 / 38
	ALPINE 310 FPK	3.00	6 / 2	55 / 75
	3060 FP	3.00	6 / 2	55 / 75
	3060 FPSL	3.00	6 / 2	55 / 75
	3060 FPKC	3.00	6 / 2	66 / 90
	3060 FPRC	3.00	6 / 2	64 / 87
	310 FQ	3.12	6 / 2	63 / 85
	310 FQ KC	3.12	6 / 2	85 / 115
	310 FQ RC	3.12	6 / 2	85 / 115
	360 FQ	3.62	7 / 2	70 / 95
	360 FQ KC	3.62	7 / 2	96 / 130
	360 FQ RC	3.62	7 / 2	96 / 130
	2460 ISL	2.42	6 / 2	37 / 50
	2870 ISL	2.82	7 / 2	44 / 60
	270 P	2.55	5 / 2	40 / 54
	320 P	3.00	6 / 2	45 / 61
	350 P	3.50	7 / 2	50 / 68
	4080 TL	4.00	8 / 2	72 / 99
	4590 TL	4.50	9 / 2	84 / 115
	3160 TLX	3.10	6 / 2	63 / 85
	3160 TLXKC	3.10	6 / 2	85 / 115
	3160 TLXRC	3.10	6 / 2	85 / 115
	3670 TLX	3.60	7 / 2	70 / 95
	3670 TLXKC	3.60	7 / 2	96 / 130
	3670 TLXRC	3.60	7 / 2	96 / 130
	911 TL	8.30	2 x 6 / 2	110 / 150
	911 TLKC	8.30	2 x 6 / 2	132 / 180
	911 TLRC	8.30	2 x 6 / 2	128 / 175
	991 TL	9.30	2 x 7 / 2	128 / 175
	991 TLKC	9.30	2 x 7 / 2	155 / 200
	9314 TLKCB	9.30	2 x 7 / 2	168 / 228
	313 TKC	3.00	6 / 2	66 / 90
	313 TRC	3.00	6 / 2	66 / 90
	3575 TKC	3.50	7 / 2	88 / 120
	3575 TRC	3.50	7 / 2	88 / 120

Booster conditioner

		Working width (m)	Tyres	Power requirement (kW/hp)
	ALPINE 285 DN	1.82	18/8.50-8	25 / 34

Twister tedder

		Working width (m)	Rotor / tine arms per rotor (number)	Power requirement (kW/hp)
	ALPINE 431 DN	4.30	4 / 6	22 / 30
	ALPINE 601 DN	5.70	6 / 5	25 / 34
	5204 DN	5.20	4 / 6	22 / 30
	6606 DN	6.60	6 / 6	30 / 41
	7706 DN	7.70	6 / 6	60 / 82
	8608 DN	8.60	8 / 6	70 / 95
	11010 DN	10.72	10 / 6	88 / 120
	901 T	8.60	8 / 6	40 / 54
	11008 T	10.20	8 / 6	40 / 54
	13010 T	12.70	10 / 6	66 / 90


Lotus tedder

		Working width (m)	Rotor / tine arms per rotor (number)	Power requirement (kW/hp)
	770	7.70	6 / 6	55 / 75
	1020 T	10.20	8 / 7	44 / 60
	1250 T	12.50	10 / 7	70 / 95

Katana forage harvester and headers

		Engine horsepower (ECE R 120) (kW/hp)	
	Katana 650	478 / 650	
		Working width (m)	Number of drums
	360plus	6.00	8
	375plus	7.50	10
	390plus	9.00	12
	460plus	6.00	4
	460plus Stalkbuster	6.00	4
	475plus	7.50	6
	Gras-Pick-UP 3003	3.00	-

Former hay rake

		Working width (m)	Rotor / tine arms per rotor (number)	Power requirement (kW/hp)
	ALPINE 351 DS	3.60	1 / 10	25 / 34
	351 DN	3.60	1 / 10	20 / 27
	391 DN	3.80	1 / 10	20 / 27
	400 DN	3.85	1 / 10	20 / 27
	426 DN	4.20	1 / 12	30 / 41
	456 DN	4.50	1 / 12	30 / 41
	1502	3.60 - 6.30 / 7.00	2 / 12 / 12	33 / 45
	1402	5.75 / 6.65	2 / 10 / 12	19 / 26
	1452	5.80 / 6.70	2 / 12 / 12	19 / 26
	1603	6.60 / 7.70	2 / 12 / 12	30 / 41
	7850	7.80 / 8.40	2 / 13 / 13	44 / 60
	7850 PRO	7.80 / 8.40	2 / 13 / 13	44 / 60
	671	5.80 - 6.60	2 / 10 / 10	19 / 26
	801	6.80 - 7.60	2 / 12 / 12	30 / 41
	880	7.20 - 8.00	2 / 12 / 12	35 / 48
	8055 PRO	7.20 - 8.00	2 / 12 / 12	35 / 48
	10065	8.80 - 10.00	2 / 15 / 15	51 / 70
	10065 PRO	8.80 - 10.00	2 / 15 / 15	51 / 70
	12545	10.0 - 12.50	4 / 4 x 12	59 / 80
	12545 PRO	10.0 - 12.50	4 / 4 x 12	59 / 80
	14055 PRO	11.50 - 14.00	4 / 4 x 13	96 / 130

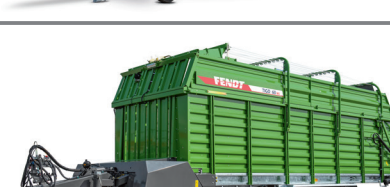
Rotana round baler

		Baler chamber volume (m³)	Baler chamber diameter (m)	Power requirement (kW/hp)
	130 F	1.50	1.25	45 / 60
	130 F Xtra	1.50	1.25	60 / 80
	130 F Combi	1.50	1.25	100/140
	160 V	2.50	0.70 - 1.60	55 / 80
	160 V Xtra	2.50	0.70 - 1.60	55 / 80
	180 V	3.10	0.70 - 1.80	70 / 110
	180 V Xtra	3.10	0.70 - 1.80	70 / 110
	160 V Combi	2.50	0.90 - 1.60	100/140

Roller bale wrapper

		Bale diameter (m)	Overall width (m)	Power requirement (kW/hp)
	130	0.90 - 1.30	2.55	30/40
	160	1.25-1.50	2.30	40/55

Tigo loading wagon

		Volumes in accordance with DIN 11741 (m³)	Power requirement (kW/hp)
	35 ST	22	29/40
	40 ST	24.5	44/60
	50 ST	29	51/70
	35 S	22	29/40
	40 S	24.5	44/60
	50 S	29	51/70
	40 MS	26	59/80
	50 MS	30	63/85
	60 MS	35	70/95
	70 MS	39	81/110
	40 MR	26	66/90
	50 MR	30	74/100
	60 MR	35	88/120
	50 MR Profi	31	74/100
	60 MR Profi	36	88/120
	100 MR Profi	50	88/120
	45 PR	31	96/130
	50 PR	31	96/130
	60 PR	36	110/150
	70 PR	41	125/175
	65 XR	38	132/180
	75 XR	44	147/200
	90 XR	50	169/230
	100 XR	54	184/250

B = Transverse conveyor belt
DN = Three-point headstock with trailing device
DS = Rigid three-point headstock
FP = Front-mounted pendulum block
FZ = Front-mounted headstock
ISL = Spur gear drive without inner shoe
KC = Tine rotor conditioner
RC = Roller conditioner

S = Lateral movement
SL = Rake
T = Conveyor running gear
TL = TurboLift-System. Number of required hydraulic connections may vary depending on the additional equipment
V = Cutting height control

Not all models are available in all markets.